


N4-Solenoid Valve

Options

- 12V DC, 24V DC, 24V AC, 110V AC, 220V AC
- Dual Coil

Port / Position	5 / 2							
Orifice	30mm ² (CV=1.7)							
Operating Pressure	28 - 142psi							
Port Size	1/4" NPT (Standard)							
Ambient Temperature	0 °C to 50 °C							
Media	Clean Compressed Air (5µm filtration)							
Voltage & Frequency	12V DC	24V DC	24V AC 50HZ	24V AC 60HZ	110V AC 50HZ	110V AC 60 HZ	220V AC 50HZ	220V AC 60HZ
Max Rated Power	6.9W	4.7W	6.9W	6.9W	4.7W	4.7W	4.7W	4.7W
Voltage Tolerance	±10%							
Duty Cycle	100%							
Protection Rating	IP65							

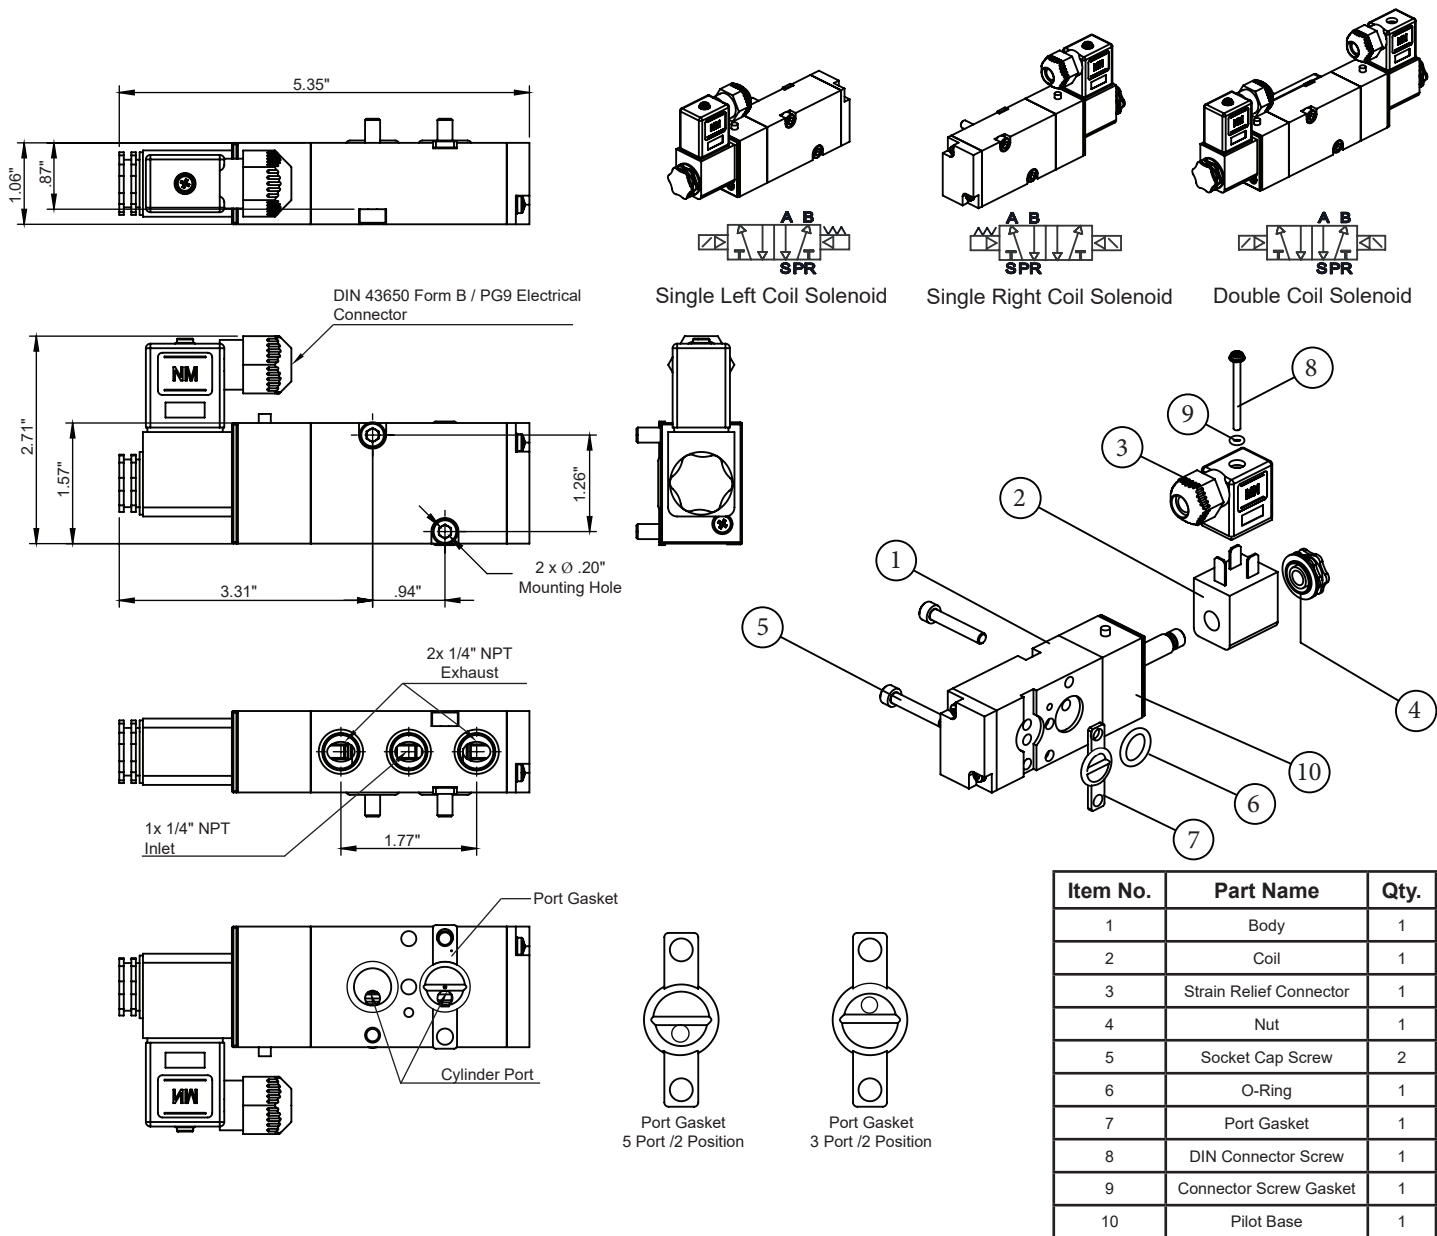

Ordering Information (Standard Configuration Shown)

A-SOL	N4	AP	5	2	L	B	B	2	A
Assembly	Types of Solenoid Valve	Body & Pilot	No. of Ports	Positions	Coil Position	Voltage	O-Ring/Seal Material	Inlet / Exh Port Size (NPT)	Connection
A - SOL	N4	AP - Aluminum / POM	5 3	2 2 2	L - Left Side Coil R - Right Side Coil B - Both Side Coils	A - 24V AC B - 110V AC C - 220V AC D - 12V DC E - 24V DC	V - Viton B - Buna-N Z - HNBR	2 - 1/4" 3 - 3/8"	A - PG9 Strain Relief

NAMUR adapter plate available.

Distributed by:



INLINE INDUSTRIES, INC.

9056 Garvey Ave., Rosemead, CA 91770

Tel: (800) 568-8998, (626) 813-6188

Fax: (626) 813-6186

www.ballvalve.com info@ballvalve.com